

---

# Industrial Ethernet Switch

---

## Product Datasheet



### TH-302-1SFP

#### Brief Introduction

TH-302-1SFP is one new generation industrial Ethernet switch with 1x10/100BASE-TX and 1x100Base-FX (SFP) that provides stable reliable Ethernet transmission, high quality design and reliability. It accepts redundant dual power supply input (9~56VDC), which can offer redundant mechanisms for critical applications that needs always-on connections. It can also operates at standard operating temperature range -40 to 75°C. It supports DIN Rail and Wall Mounting with IP40 protection for harsh environments.

#### Main Features

- 1x10/100Base-TX RJ45 ports and 1x100Base-FX (SFP)
- Support 1Mbit packet buffer.
- Support IEEE802.3/802.3u/802.3ab/802.3z/802.3x
- Support redundant dual power input 9~56VDC
- -40~75°C operation temperature for harsh environment
- IP40 Aluminum case, no fan design
- Installation method: DIN Rail /Wall mounting


---

## Product Specifications

<b>Ethernet Interface</b>	
Ports	1×10/100BASE-TX and 1x100Base-FX (SFP)
Power input terminal	Five-pin terminal with 3.81mm pitch
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3x for flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging
Packet Buffer Size	1M
Maximum Packet Length	10K
MAC Address Table	2K
Transmission Mode	Store and Forward (full/half duplex mode)
Exchange Property	Delay time < 7μs
Backplane bandwidth	1.8Gbps
<b>Power</b>	
Power Input	Dual power input 9-56VDC
Power consumption	Full Load<3W
<b>Physical Characteristics</b>	
Housing	Aluminum case
Dimensions	120mm x 90mm x 35mm (L x W x H)
Weight	320g
Installation Mode	DIN Rail and Wall Mounting
<b>Working Environment</b>	
Operating Temperature	-40°C~75°C (-40 to 167 °F)

Operating Humidity	5%~90% (non-condensing)	
Storage Temperature	-40℃~85℃ (-40 to 185 ℉)	
<b>Warranty</b>		
MTBF	500000 hours	
Defects Liability Period	5 years	
<b>Certification Standard</b>	FCC Part15 Class A CE-EMC/LVD ROSH IEC 60068-2-27 (Shock) IEC 60068-2-6 (Vibration) IEC 60068-2-32 (Free fall)	IEC 61000-4-2 ( ESD ): Level 4 IEC 61000-4-3 ( RS ): Level 4 IEC 61000-4-2 ( EFT ): Level 4 IEC 61000-4-2 ( Surge ): Level 4 IEC 61000-4-2 ( CS ): Level 3 IEC 61000-4-2 ( PFMP ): Level 5

### Dimensions

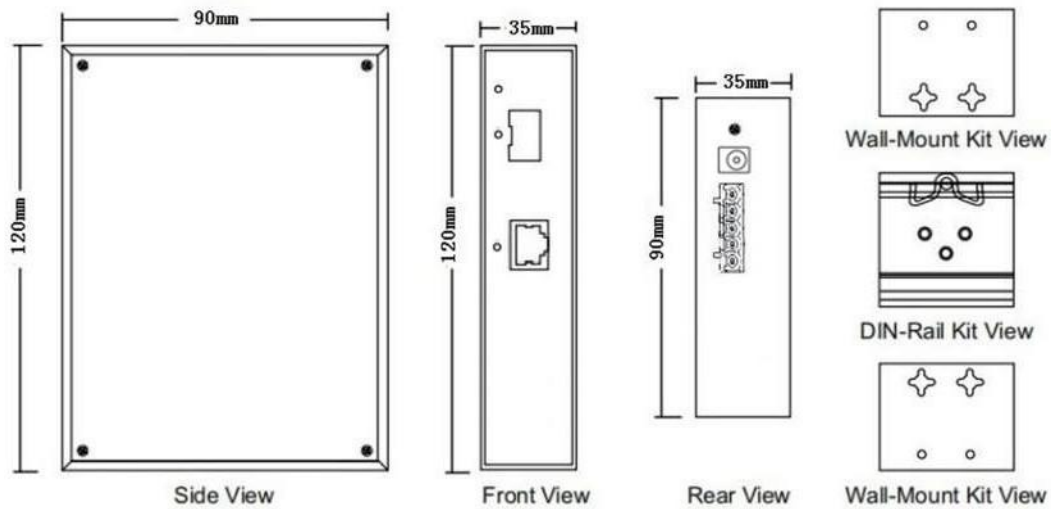

### Order Information

Model Name	Description
TH-302-1SFP	Industrial unmanaged switch with 1x10/100Base-TX RJ45 ports and 1x100Base-FX (SFP). dual power input voltage 9~56VDC